

S/N 09982589

TH

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:
Serial No.:

Hokkanen
09982589

Examiner:

To be assigned

Group Art Unit:

2681

Docket No.:

975.365USW1

Filed:

10/17/01

Title:

METHOD AND DEVICE FOR PERFORMING HANDOVER USING
LOCATION INFORMATION

CERTIFICATE OF MAILING UNDER 37 C.F.R. 81.8

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Assistant Commissioner for Patents, Washington, DC 20231 on November 30, 2001.

Michael B. Lasky

Name

Signature

SUBMISSION OF PRIORITY DOCUMENT

Box Missing Parts
Assistant Commissioner for Patents
Washington, D.C. 20231

COPY OF PAPERS
ORIGINALLY FILED

Dear Sir:

Enclosed is a certified copy of EP application, Serial Number PCT/EP99/02966,
filed 30 April 1999, the priority of which is claimed under 35 U.S.C. §120.

Respectfully submitted,

Altera Law Group, LLC
6500 City West Parkway - Suite 100
Minneapolis, MN 55344-7701
952-912-0527

Date: November 30, 2001

By:

Michael B. Lasky
Reg. No. 29,555
MBL/blj

**CERTIFIED COPY OF
PRIORITY DOCUMENT**



COPY OF PAPERS
ORIGINALLY FILED

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten internationalen Patentanmeldung überein.

The attached documents are exact copies of the international patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet international spécifiée à la page suivante.

Den Haag, den
The Hague,
La Haye, le

12.11.2001

Der Präsident des Europäischen Patentamts
Im Auftrag
For the President of the European Patent Office
Le Président de l'Office européen des brevets
p. o.

C. Stuckart

Patentanmeldung Nr. PCT/EP 99/02966
Patent application no.
Demande de brevet n°



Anmeldung Nr.: PCT/EP 99/02966
Application no.:
Demande n°:

Anmelder: 1. NOKIA TELECOMMUNICATIONS OY - Espoo, Finland
Applicant(s): 2. HOKKANEN, Tuomo - Helsinki, Finland
Demandeur(s):

Bezeichnung der Erfindung:

Title of the invention: METHOD AND DEVICE FOR PERFORMING A HANDOVER PROCEDURE
Titre de l'invention: USING LOCATION INFORMATION

Anmeldetag:
Date of filing: 30 April 1999(30.04.99)
Date de dépôt:

In Anspruch genommene Priorität(en)

Priority(ies) claimed
Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Benennung von Vertragsstaaten : Siehe Formblatt PCT/RO/101 (beigefügt)
Designation of contracting states : See Form PCT/RO/101 (enclosed)
Désignation d'états contractants : Voir Formulaire PCT/RO/101 (ci-joint)

Bemerkungen:

Remarks:
Remarques:

PCT REQUEST

WO 23662

Original (for SUBMISSION) - printed on 30.04.1999 03:17:52 PM

IV-1	Agent or common representative; or address for correspondence The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:	agent
IV-1-1	Name (LAST, First)	LESON, Thomas, Johannes, Alois
IV-1-2	Address:	Tiedtke-Bühling-Kinne et al. Bavariaring 4 D-80336 München Germany
IV-1-3	Telephone No.	+49 89 544690
IV-1-4	Facsimile No.	+49 89 532611
IV-1-5	e-mail	postoffice tbk-patent.com
IV-2	Additional agent(s)	additional agent(s) with same address as first named agent
IV-2-1	Name(s)	TIEDTKE, Harro; BÜHLING, Gerhard; KINNE, Reinhard; GRAMS, Klaus; LINK, Annette; VOLLNHALS, Aurel; PELLMANN, Hans-Bernd; TRÖSCH, Hans-Ludwig; CHIVAROV, Georgi; GRILL, Matthias; KÜHN, Alexander; OSER, Andreas; BÖCKELEN, Rainer
V	Designation of States	
V-1	Regional Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AP: GH GM KE LS MW SD SZ UG ZW and any other State which is a Contracting State of the Harare Protocol and of the PCT EA: AM AZ BY KG KZ MD RU TJ TM and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT EP: AT BE CH&LI CY DE DK ES FI FR GB GR IE IT LU MC NL PT SE and any other State which is a Contracting State of the European Patent Convention and of the PCT OA: BF BJ CF CG CI CM GA GN GW ML MR NE SN TD TG and any other State which is a member State of OAPI and a Contracting State of the PCT
V-2	National Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AE AL AM AT AU AZ BA BB BG BR BY CA CH&LI CN CU CZ DE DK EE ES FI GB GD GE GH GM HR HU ID IL IN IS JP KE KG KP KR KZ LC LK LR LS LT LU LV MD MG MK MN MW MX NO NZ PL PT RO RU SD SE SG SI SK SL TJ TM TR TT UA UG US UZ VN YU ZA ZW

- 1 -

METHOD AND DEVICE FOR PERFORMING A HANDOVER PROCEDURE USING
LOCATION INFORMATION

FIELD OF THE INVENTION

5

The present invention relates to a method for performing a handover procedure for a mobile station movable in a communication network between different cells, and also to a corresponding device. In particular, the present
10 invention is directed to a method and a corresponding device using location information for performing the handover procedure.

BACKGROUND OF THE INVENTION

15

As is commonly known a mobile communication network such as a GSM-system is hierarchically structured as follows. A mobile services switching center MSC controls at least one base station controller BSC. One base station controller in
20 turn controls at least one base transceiver station BTS which covers a designated communication area. Said communication area or coverage is called a cell. The base transceiver station communicates with a respective mobile station MS within this cell.

25

When the mobile station moves within the communication network it has to be ensured that the connection between the mobile station and the communication network is not interrupted even when the mobile station leaves the cell
30 (i.e. the coverage area) of one base transceiver station and enters another cell. The procedure used for maintaining connection is referred to as a handover.

35

During such a handover procedure the connection of the mobile station to the communication network is changed from one cell to another cell. Additionally, this base

transceiver station handover can be combined with a base station controller handover when the respective base transceiver stations are controlled by different base station controllers. Moreover, a handover can also occur
5 between two mobile services switching centers in a corresponding case. Furthermore, a handover is also possible between communication networks using different technologies such as a handover between a GSM network and a wideband code division multiple access (WCDMA) network or
10 between a GSM network and a radio local area network (RLAN).

To decide whether a handover is necessary, certain measurements are required. By these measurements, e.g., a
15 signal quality, such as quality of the connection, signal strength, bit error rate and the like, is checked for several monitored base transceiver stations. The corresponding results are used to decide whether a handover is required. For example, the signal strength of the
20 current base transceiver station decreases while the signal strength of another base transceiver station increases. If a signal strength ratio reaches a predetermined level (i.e., the signal quality of the currently used base transceiver station is lower than a predetermined threshold
25 level), a handover from the currently used base transceiver station to the other base transceiver station having a better signal quality will be initiated.

To inform the mobile station as to which base transceiver
30 stations are available (i.e. in which coverage areas the mobile station is) and to make necessary information for said measurement available, the base transceiver stations use signaling channels to send and receive this information. One of said signaling channels is a broadcast control channel (BCCH) which is permanently broadcasted by
35 a respective base transceiver station, e.g. in a certain

timeslot of a TDMA frame. Said BCCH can be compared with a radio beacon of the base transceiver station, wherein via said BCCH the first contact between the mobile station and the base transceiver station is established. The BCCH is also used to inform the mobile station about access parameters and the like and to enable a position determination.

On the other hand, a handover can also be required in the case, that there is too much traffic in the corresponding cell. Each cell has a limited number of traffic channels (TCH) used for data exchange or speech transmission. If a subscriber wants to make a call but no more TCH is available because of too many currently active calls, a handover is performed to another cell with an available TCH, even if measurement of, e.g., signal strength results in a lower value for this new cell.

It is to be noted, that a handover procedure can be executed during a call setup phase and during an active call.

However, as only a limited number of channels is available, a permanent transmission of a channel like said BCCH is wasteful in terms of the radio communication resources of the communication network.

Additionally, each of the base transceiver stations of the communication network has permanently to be turned on to transmit said BCCH, even if there is no mobile station present within its coverage area. This results in an unnecessary power waste.

SUMMARY OF THE INVENTION

Therefore, it is an object of the present invention to provide a method which enables to perform a handover procedure while maintaining a better use of available radio resources, and to provide a corresponding device for performing said handover procedure.

According to the present invention, this object is achieved by a method for performing a handover procedure for a mobile station communicating in a communication network and being movable therein, said communication network comprising a plurality of base transceiver stations being adapted to perform a communication with said mobile station within its coverage area, said method comprising the steps of processing location information related to the mobile station and position information related to the base transceiver stations, deciding on the basis of the result of said processing, whether a first handover condition is fulfilled, designating a next base transceiver station in said communication network, to which the communication with said mobile station is to be directed from a current base transceiver station, when the first handover condition is fulfilled, triggering a handover of the communication connection of the mobile station from the current base transceiver station to the next base transceiver station designated in said designating step, and performing the handover.

Furthermore, the present invention proposes a device for controlling a handover procedure for a mobile station communicating in a communication network and being movable therein, said communication network comprising a plurality of base transceiver stations being adapted to perform a communication with said mobile station within its coverage area, said device comprising a processing means for processing location information related to said mobile station and position information related to base

transceiver stations, and for deciding on the basis of the result of said processing, whether a first handover condition is fulfilled, a designating means for designating a next base transceiver station in said communication network, to which the communication with said mobile station is to be switched from a current base transceiver station, when the first handover condition is fulfilled, and a triggering means for triggering a handover of the communication connection of the mobile station from the current base transceiver station to the next base transceiver station designated by said designating means.

Advantageous further developments of the present invention are as set out in the respective dependent claims.

According to the present invention, the proposed method and/or device use location information which is, for example, periodically determined to decide whether a handover is to be performed and to which base transceiver station the communication connection is to be changed. This allows the usage of base transceiver stations which do not transmit a broadcast control channel, since the handover is initiated by the corresponding network device, e.g., the base station controller BSC. This decreases the system interference level and increases the network capacity by reducing channels not directly used for communication.

Furthermore, base transceiver stations can be used which can be turned off. Said base transceiver stations are only turned on by the corresponding base station controller when a mobile station is within the coverage area of said base transceiver stations. This saves costs and reduces power consumption.

Preferred embodiments of the invention are described herein below in detail by way of example with reference to the accompanying drawings.

5 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows in detail a basic structure of a communication network.

10 FIG. 2 shows a flowchart of a handover procedure according to the present invention in a communication network according to FIG. 1.

15 FIG. 3 shows a block circuit diagram of a device for controlling a handover procedure according to the present invention.

DESCRIPTION OF PREFERRED EMBODIMENTS

20 FIG. 1 shows a basic structure of a communication network, for example, in a GSM system. A mobile station MS moves in said communication network. Said communication network comprises at least one mobile services switching center MSC which controls the communication network. Said mobile
25 services switching center MSC is connected to one or more base station controllers BSC 1, BSC 2 and BSC 3. Each of said base station controllers is connected to and controls respective base transceiver stations BTS 1A, BTS 1B, BTS 2 and BTS 3. The base transceiver stations have a respective
30 coverage area in which they are adapted to perform a communication with said mobile station MS. Said coverage area is called a cell.

35 As mentioned above, when the mobile station is moved within said communication area and, for example, a signal quality of a cell currently connected with the mobile station MS is

decreasing, a handover procedure can be required. The different possibilities of handover are indicated by dotted lines. These possibilities are a handover between cells of one base station controller BSC 1 (BTS 1A to BTS 1B) or
5 between cells of different base station controllers BSC1 and BSC2 (BTS 1B to BTS 2). Another possibility indicated is a handover from BTS 1B to BTS 3. This is part of a second embodiment which will be described later.

10 It is obvious, that the control for the handover procedure is in a network element, such as in a base station controller BSC or in the mobile services switching center MSC, depending on which hierarchic level the handover takes place. In the following, a case is described in detail with
15 reference to FIG. 2, in which a handover procedure according to the invention occurs between base transceiver stations BTS 1A and BTS 1B of the same base station controller BSC 1.

20 With reference to FIG. 2, the handover procedure according to the invention is described. After the mobile station MS has established a communication connection with the network (step S1), a location information obtaining step S2 is performed. Said location information obtaining step S2
25 comprises determining of the location related to said mobile station MS and transferring said obtained location information to a network device (here, to the BSC 1) for further processing.

30 Determining the location related to a mobile station MS can be performed by different methods. For example, the global positioning system (GPS) is used for such a purpose. Further, known measurement methods like an observed time difference (OTD) or a time of arrival (TOA) can be employed
35 for a location determination. Also, a combination of said measurements is possible. The technology for locating a

mobile station is already used in E911 services, which grant a position determination of a mobile station provided with a corresponding equipment.

5 Said location determination can be executed by GPS, TOA, OTD or the like, as mentioned above. The location determination can be, for example, triggered periodically. The period and the kind of location measurement can be subscriber specific. Furthermore, the location
10 determination can be performed in the mobile station MS or in a respective network element, such as a base transceiver station BTS, depending on which location determination method is employed (e.g. when using GPS, in the mobile station MS).

15 Location information obtained in said location information obtaining step S2 referring to the location of the mobile station MS is transferred to a respective network element BSC 1. However, as mentioned above, if the handover
20 procedure is performed between base transceiver stations of different base station controllers, information is transmitted to the mobile services switching center MSC, since the MSC performs control for the latter kind of handover.

25 In the described case, the location information is processed in the base station controller BSC 1 (step S3). Within said processing, the transmitted location information is compared with known position information of
30 base transceiver stations, e.g. BTS 1B, to examine, for example, when the mobile station MS is within the coverage area of a adjacent base transceiver station, thereby fulfilling a handover condition. Said position information relating to the base transceiver stations also comprises
35 information of the coverage area of the respective cell and

of directional pattern of the respective base transceiver station.

5 After processing the location information, it is decided in
step S4 based on the location information processed in said
processing step S3, whether a (first) handover condition is
fulfilled, e.g., because of a movement of the mobile
station MS in the coverage area of said base transceiver
station BTS 1B and due to a decreasing in the signal
10 quality. If the decision in step S4 is YES, a base
transceiver station in said communication network is
designated as a target for the handover (step S9). Said
designated base transceiver station is, for example, the
BTS 1B, to which the communication connection will be
15 directed from the currently used base transceiver station
BTS 1A.

In step S10 the communication connection of the mobile
station MS to the communication network is directed from
20 the current base transceiver station BTS 1A to the next
base transceiver station BTS 1B designated in said
designating step S9. Thereafter, the handover is performed
(step S11) and the procedure returns to step S1 (step S12).

25 If the decision in step S4 is NO, a step S5 follows, in
which it is checked, whether further measurements are to be
executed. This can be on subscriber specific. If no further
measurements are to be executed, the process proceeds to
step S12.

30 If the decision in step S5 is YES, a measurement to be
performed is selected (step S6), e.g., on basis of
subscriber specifications. Said measurement is for example
an availability of traffic channels, a signal strength or
35 the like. In step S7, the designated measurement is
executed.

Subsequently, in step S8, the measurement result is verified. If the measurement result indicates no need for a handover (e.g. enough traffic channels are available) the process proceeds to step S13. On the other hand, if the measurement result indicates a (second) handover condition (decision in step S8 is YES), said second handover condition is given back to the target cell designation step S9 for performing a handover (S10, S11).

With reference to FIG. 3, a device for controlling the handover procedure described above with reference to FIG. 2 is described. Namely, a case is described in detail in which a handover procedure according to the invention occurs between base transceiver stations BTS 1A and BTS 1B of the same base station controller BSC 1. However, also a handover in another hierarchic level, as mentioned above, can be controlled by an corresponding device.

Said device includes a location obtaining means 1 for obtaining location information related to said mobile station MS. The location obtaining means 1 receives location information related to the mobile station MS from the mobile station MS itself or from the current base transceiver station BTS (indicated by dotted lines), depending on which respective locating method is used for location determination (global positioning system GPS, time of arrival TOA, observed time difference OTD or the like), as mentioned above. To simplify matters, the location information from the mobile station itself is directed directly to the location obtaining means 1, although it is easy to understand that it is directed via an air interface to the base transceiver station BTS and therefrom to the location obtaining means 1.

The location determination can be, for example, triggered periodically. The period and the kind of location measurement can be subscriber specific.

5 The received location information is forwarded by said location obtaining means 1 to a processing means 2 and a memory means 3. Said processing means 2 process the location information related to the mobile station MS and position information of the base transceiver stations BTS
10 (in this case, the position and coverage area information of BTS 1B). Said position information is stored in said memory means 3. Also, the location information related to the mobile station MS is stored in said memory means 3.

15 The processing means 2 compares the location of the mobile station MS and the position information of the base transceiver stations BTS. On the basis of said comparison, the processing means 2 decides, whether a first handover condition is fulfilled, for example, when the mobile
20 station moves within another base transceiver station coverage area. If the first handover condition is fulfilled, a target cell designating means 4 designates a target base transceiver station (in this case the BTS 1B) in said communication network, to which the communication
25 connection is to be directed from the current base transceiver station BTS 1A.

A triggering means 5 performs the handover of the communication connection of the mobile station MS from the
30 current base transceiver station BTS 1A to the new base transceiver station BTS 1B designated by said designating means 4 by forwarding correspondent commands.

35 If the above mentioned first handover condition is not fulfilled, the processing means 2 can cause a further measurement. Therefore, the device includes a measurement

means 6 which checks, whether a measurement is to be performed, e.g. because the first handover condition is not fulfilled. This can be subscriber specific.

5 The measurement means 6 selects a kind of measurement (e.g., availability of traffic channels, signal strength or the like) and executes the selected measurement. Thereafter, the measurement means 6 verifies, whether a measurement result indicates a second handover condition.
10 If said measurement result indicates the second handover condition, the measurement means 6 reports said result to the processing means 2 for performing a handover.

15 It is to be noted, that the location obtaining means (1) is a dedicated network element, which can be a part of another network element (such as mobile station MS on the user side or base station controller BSC at the network side). The necessary information for determining the location of the mobile station MS are, for example, received from a network
20 element (e.g. transceiver station BTS) or from a system not included in the communication network (GPS-satellite).

As mentioned above, as a second embodiment, there is a third possibility of performing a handover in the
25 communication network according to FIG. 1. In this case, the cell or base transceiver station BTS 3, to which the connection is changed, is not adjacent to the original base transceiver station BTS 1B. To take said base transceiver station BTS 3 into consideration at the processing step S4
30 according to FIG. 2, it has to be stored as possible target cell. It can be stored in the memory means 3 according to FIG. 3, but also in a (not shown) subscriber identity module SIM which identifies the subscriber in the communication network by stored data, or in the mobile
35 station itself.

In the examples described above, the handover is performed when location information and additional information (e.g., signal quality) indicate the need for such a handover.

However, it is also possible, that the present invention operates in such way, that on basis of the location information a handover is prevented, even when a measurement of signal quality indicates that the communication connection becomes worse. On the other hand, the location information can be used in such way, that, on basis of said location information, the handover is triggered, even if the signal quality is still good.

The present invention is applicable especially to indoor communication networks like the GSM Indoor and Office (GIO) concept. Such a indoor communication network comprises many small cells for many subscribers in a small area. The movement of mobile stations therein is rather limited, but communication traffic in such a network is very high in special times (weekdays during the working time). On the other hand, there are only a few subscribers in some cells in other times (besides working time). Therefore, a part of the base transceiver stations can be turned off during the latter times. The corresponding cells are turned on and off by the respective network device controlling the handover. In the above described case this is the base station controller BSC 1.

Moreover, the present invention is applicable to network solutions in a subway or the like, as trains (with mobile stations therein) are only moving in respective one direction during special periods of time. Therefore, only needed cells are to be turned on.

However, it is easy understood, that the application field of the present invention is also in other microcellular communication network structures.

Furthermore, it is obvious, that the present invention is applicable to any handover procedure such as an inter cell handover, an inter BSC handover, an inter MSC handover and also to a handover between communication networks using different technologies (handover between a GSM network and a wideband code division multiple access (WCDMA) network or between a GSM network and a radio local area network (RLAN)).

In the present invention, a method is proposed for performing a handover procedure for a mobile station MS communicating in a communication network and being movable therein, said communication network comprising a plurality of base transceiver stations being adapted to perform a communication with said mobile station MS within its coverage area, said method comprising the steps of processing (S3) location information related to the mobile station MS and position information related to the base transceiver stations BTS 1A, BTS 1B, BTS 2, BTS 3, deciding (S4) on the basis of the result of said processing S3, whether a first handover condition is fulfilled, designating (S9) a next base transceiver station in said communication network, to which the communication with said mobile station MS is to be directed from a current base transceiver station, when the first handover condition is fulfilled, triggering a handover S10 of the communication connection of the mobile station MS from the current base transceiver station to the next base transceiver station designated in said designating step S10, and performing (S11) the handover. Furthermore, a corresponding device for controlling said handover is proposed. The advantage of the present invention is, that base transceiver stations can be used which do not permanently transmit a broadcast control channel or which can be turned off, when no subscribers are within the coverage area.

It should be understood that the above description and accompanying figures are merely intended to illustrate the present invention by way of example only. The preferred
5 embodiments of the present invention may thus vary within the scope of the attached claims.

10

15

20

CLAIMS

1. A method for performing a handover procedure for
a mobile station (MS) communicating in a communication
5 network and being movable therein,
said communication network comprising
a plurality of base transceiver stations being adapted
to perform a communication with said mobile station (MS)
within its coverage area,
10 said method comprising the steps of
processing (S3) location information related to the
mobile station (MS) and position information related to the
base transceiver stations (BTS 1A, BTS 1B, BTS 2, BTS 3),
deciding (S4) on the basis of the result of said
15 processing (S3), whether a first handover condition is
fulfilled,
designating (S9) a next base transceiver station in
said communication network, to which the communication with
said mobile station (MS) is to be directed from a current
20 base transceiver station, when the first handover condition
is fulfilled,
triggering a handover (S10) of the communication
connection of the mobile station (MS) from the current base
transceiver station to the next base transceiver station
25 designated in said designating step (S10), and
performing (S11) the handover.

2. A method according to claim 1, wherein
in said processing step (S3) at least one additional
30 parameter is processed together with said location
information related to the mobile station (MS) and position
information related to the base transceiver stations (BTS
1A, BTS 1B, BTS 2, BTS 3).

35 3. A method according to claim 2, wherein

said additional parameter is based on a signal quality.

4. A method according to claim 1, further comprising a location information obtaining step (S2) comprising a step of determining said location information related to the mobile station (MS) and

a step of transmitting said determined location information to a respective network device (BSC, MSC) adapted to perform said processing step (S3).

5. A method according to claim 4, wherein said step of determining said location information related to the mobile station (MS) is executed in the mobile station (MS).

6. A method according to claim 4, wherein said step of determining said location information related to the mobile station (MS) is executed in a network element on the network infrastructure side.

7. A method according to claim 4, wherein said step of determining said location information related to the mobile station (MS) is based on at least one of the following methods:

locating by a global positioning system;
locating by a time of arrival;
locating by an observed time difference.

8. A method according to claim 4, wherein said location information obtaining step (S2) is executed periodically.

9. A method according to claim 4, wherein said location obtaining step (S2) is executed upon predetermined occasions.

10. A method according to claim 9, wherein said predetermined occasion is a attachment procedure of the mobile station (MS) to the communication network.

5 11. A method according to claim 1, wherein,
if the first handover condition is not fulfilled,
the method further comprises the steps of
checking (S5), whether a further measurement is to be performed,

10 selecting (S6) a type of further measurement, if a measurement is to be performed,

executing (S7) the measurement selected in said selecting step (S6),

15 verifying (S8), whether a measurement result represents a second handover condition, and

if the result of said verifying step (S8) represents the second handover condition, initiating execution of said target cell designation step (S9) for performing the handover (S10, S11).

20 12. A method according to claim 1, wherein said first handover condition is subscriber specific.

25 13. A method according to claim 1, wherein the coverage area of the base transceiver station designated in said designating step (S9) and to which the communication connection is to be directed (S10) is a coverage area adjacent to the coverage area of the current base transceiver station.

30 14. A method according to claim 1, wherein the coverage area of the base transceiver station designated in said designating step (S9) and to which the communication connection is to be directed (S10) is a coverage area not
35 adjacent to the coverage area of the current base transceiver station.

15. A method according to claim 14, wherein the coverage area not adjacent to the coverage area of the current base transceiver station to which the communication connection is to be directed (S10) is known to the communication network.

16. A method according to claim 15, wherein the base transceiver station (BTS) with the coverage area not adjacent to the coverage area of the current base transceiver station, to which the communication connection is to be directed (S10), is a predetermined base transceiver station (BTS).

17. A method according to claim 16, wherein the position information of the predetermined base transceiver station (BTS) is stored in a subscriber identity module (SIM) or in the mobile station (MS).

18. A device for controlling a handover procedure for a mobile station (MS) communicating in a communication network and being movable therein,
said communication network comprising
a plurality of base transceiver stations being adapted to perform a communication with said mobile station (MS) within its coverage area,
said device comprising

a processing means (2) for processing location information related to said mobile station (MS) and position information related to base transceiver stations (BTS), and for deciding on the basis of the result of said processing, whether a first handover condition is fulfilled,

a designating means (4) for designating a next base transceiver station in said communication network, to which the communication with said mobile station (MS) is to be

switched from a current base transceiver station, when the first handover condition is fulfilled, and

5 a triggering means (5) for triggering a handover of the communication connection of the mobile station (MS) from the current base transceiver station to the next base transceiver station designated by said designating means (4).

10 19. A device according to claim 18, wherein

in said processing means (2) at least one additional parameter is processed together with said location information related to the mobile station (MS) and position information related to the base transceiver stations (BTS 1A, BTS 1B, BTS 2, BTS 3).

15 20. A method according to claim 19, wherein

said additional parameter is based on a signal quality.

20 21. A device according to claim 18, further comprising means (1)

for determining location information related to the mobile station (MS) and

25 for transmitting said determined location information to a respective network device (BSC, MSC) performing said processing.

30 22. A device according to claim 21, further comprising a memory means (3) for memorizing location information related to the mobile station (MS) and position information related to the base transceiver stations (BTS),

35 23. A device according to claim 21, wherein said means (1) for determining location information related to the mobile station (MS) and for transmitting said determined location information to a respective network device (BSC, MSC)

performing said processing are located in the mobile station (MS).

24. A device according to claim 21, wherein said means (1) for determining location information related to the mobile station (MS) and for transmitting said determined location information to a respective network device (BSC, MSC) performing said processing are located in a network element on the network infrastructure side.

25. A device according to claim 21, wherein said means (1) for determining the location information related to the mobile station (MS) is adapted to perform said determination according to at least one of the following methods:

- locating by a global positioning system;
- locating by a time of arrival;
- locating by an observed time difference.

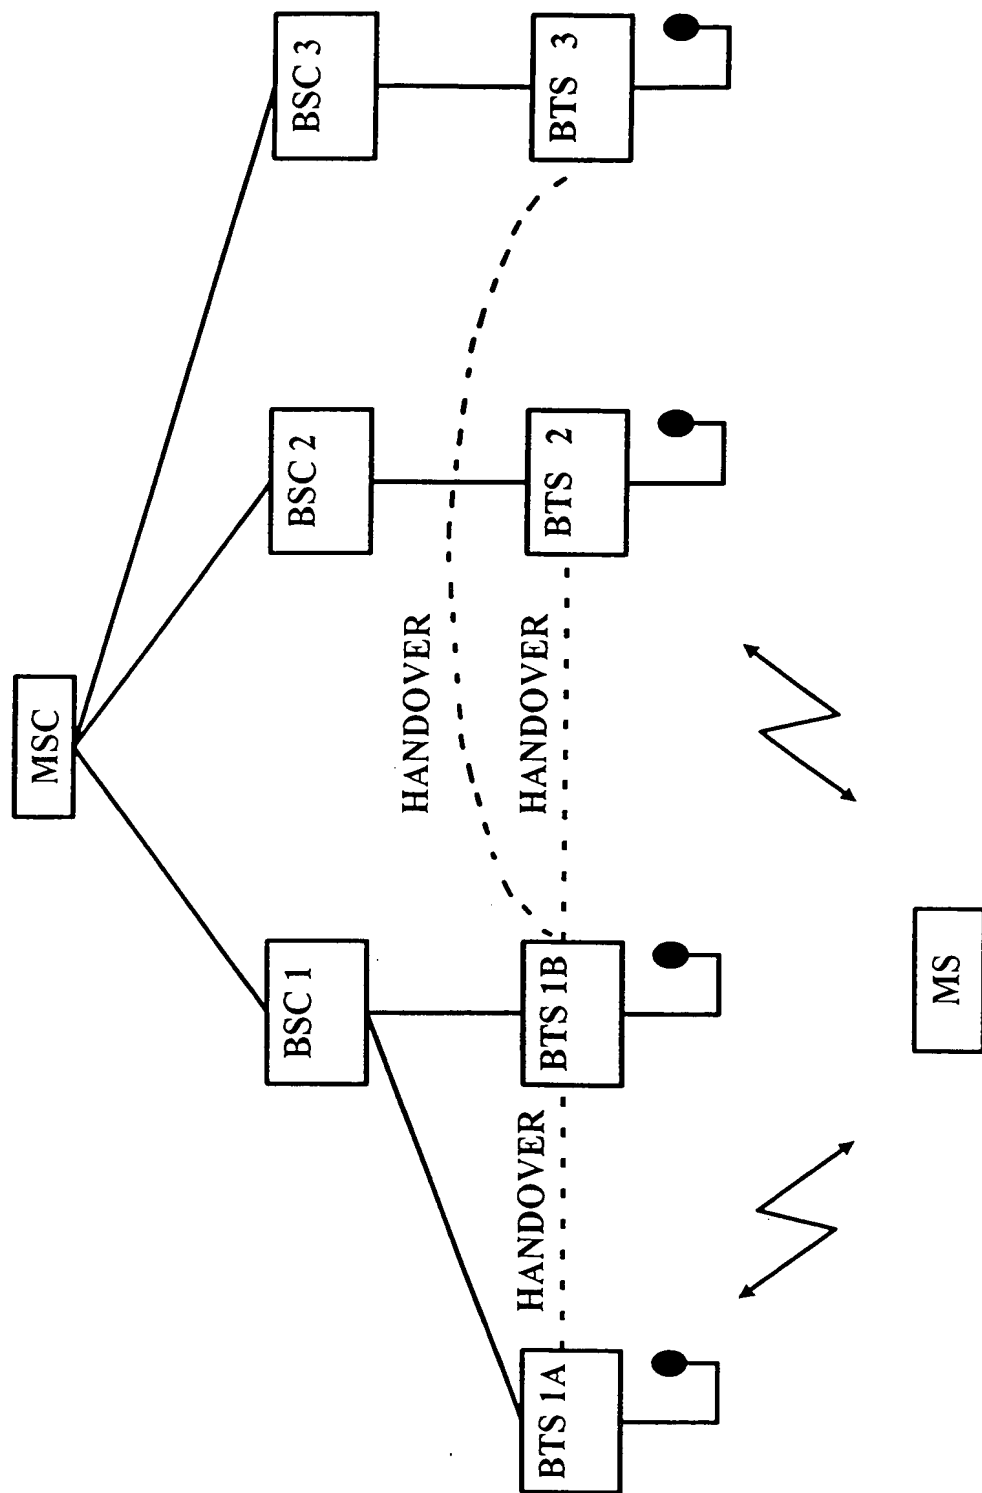
26. A device according to claim 18, further comprising a measurement means (6) adapted to

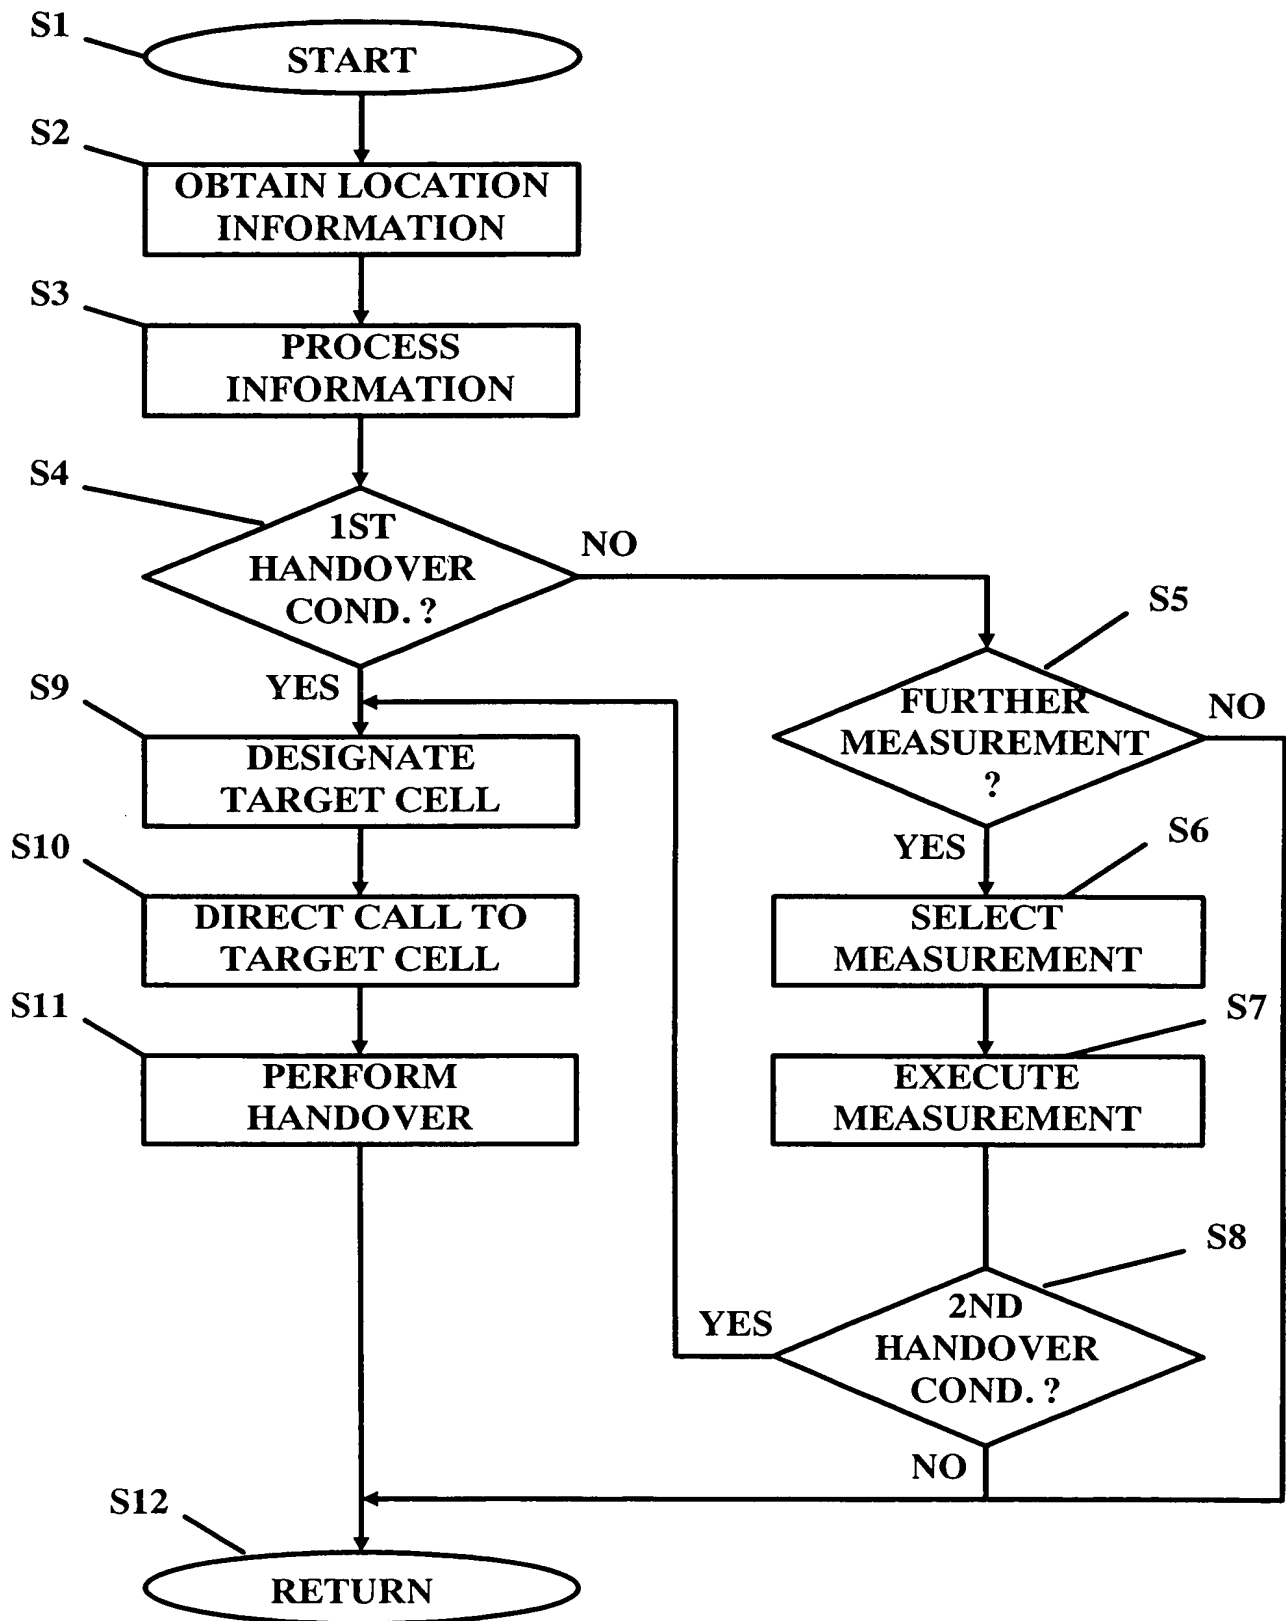
- check, whether a further measurement is to be performed,
- select a type of further measurement, if a measurement is to be performed,
- execute the selected measurement,
- verify, whether a measurement result represents a second handover condition, and
- if said second handover condition is verified,

forwarding the measurement result to said handover condition processing means (2) for performing the handover.

ABSTRACT

In the present invention, a method is proposed for performing a handover procedure for a mobile station (MS) communicating in a communication network and being movable therein, said communication network comprising a plurality of base transceiver stations being adapted to perform a communication with said mobile station (MS) within its coverage area, said method comprising the steps of processing (S3) location information related to the mobile station (MS) and position information related to the base transceiver stations (BTS 1A, BTS 1B, BTS 2, BTS 3), deciding (S4) on the basis of the result of said processing (S3), whether a first handover condition is fulfilled, designating (S9) a next base transceiver station in said communication network, to which the communication with said mobile station (MS) is to be directed from a current base transceiver station, when the first handover condition is fulfilled, triggering a handover (S10) of the communication connection of the mobile station (MS) from the current base transceiver station to the next base transceiver station designated in said designating step (S9), and performing (S11) the handover. Furthermore, a corresponding device for controlling said handover is proposed. The advantage of the present invention is, that base transceiver stations can be used which do not permanently transmit a broadcast control channel or which can be turned off, when no subscribers are within the coverage area.

FIG. 1

**FIG. 2**

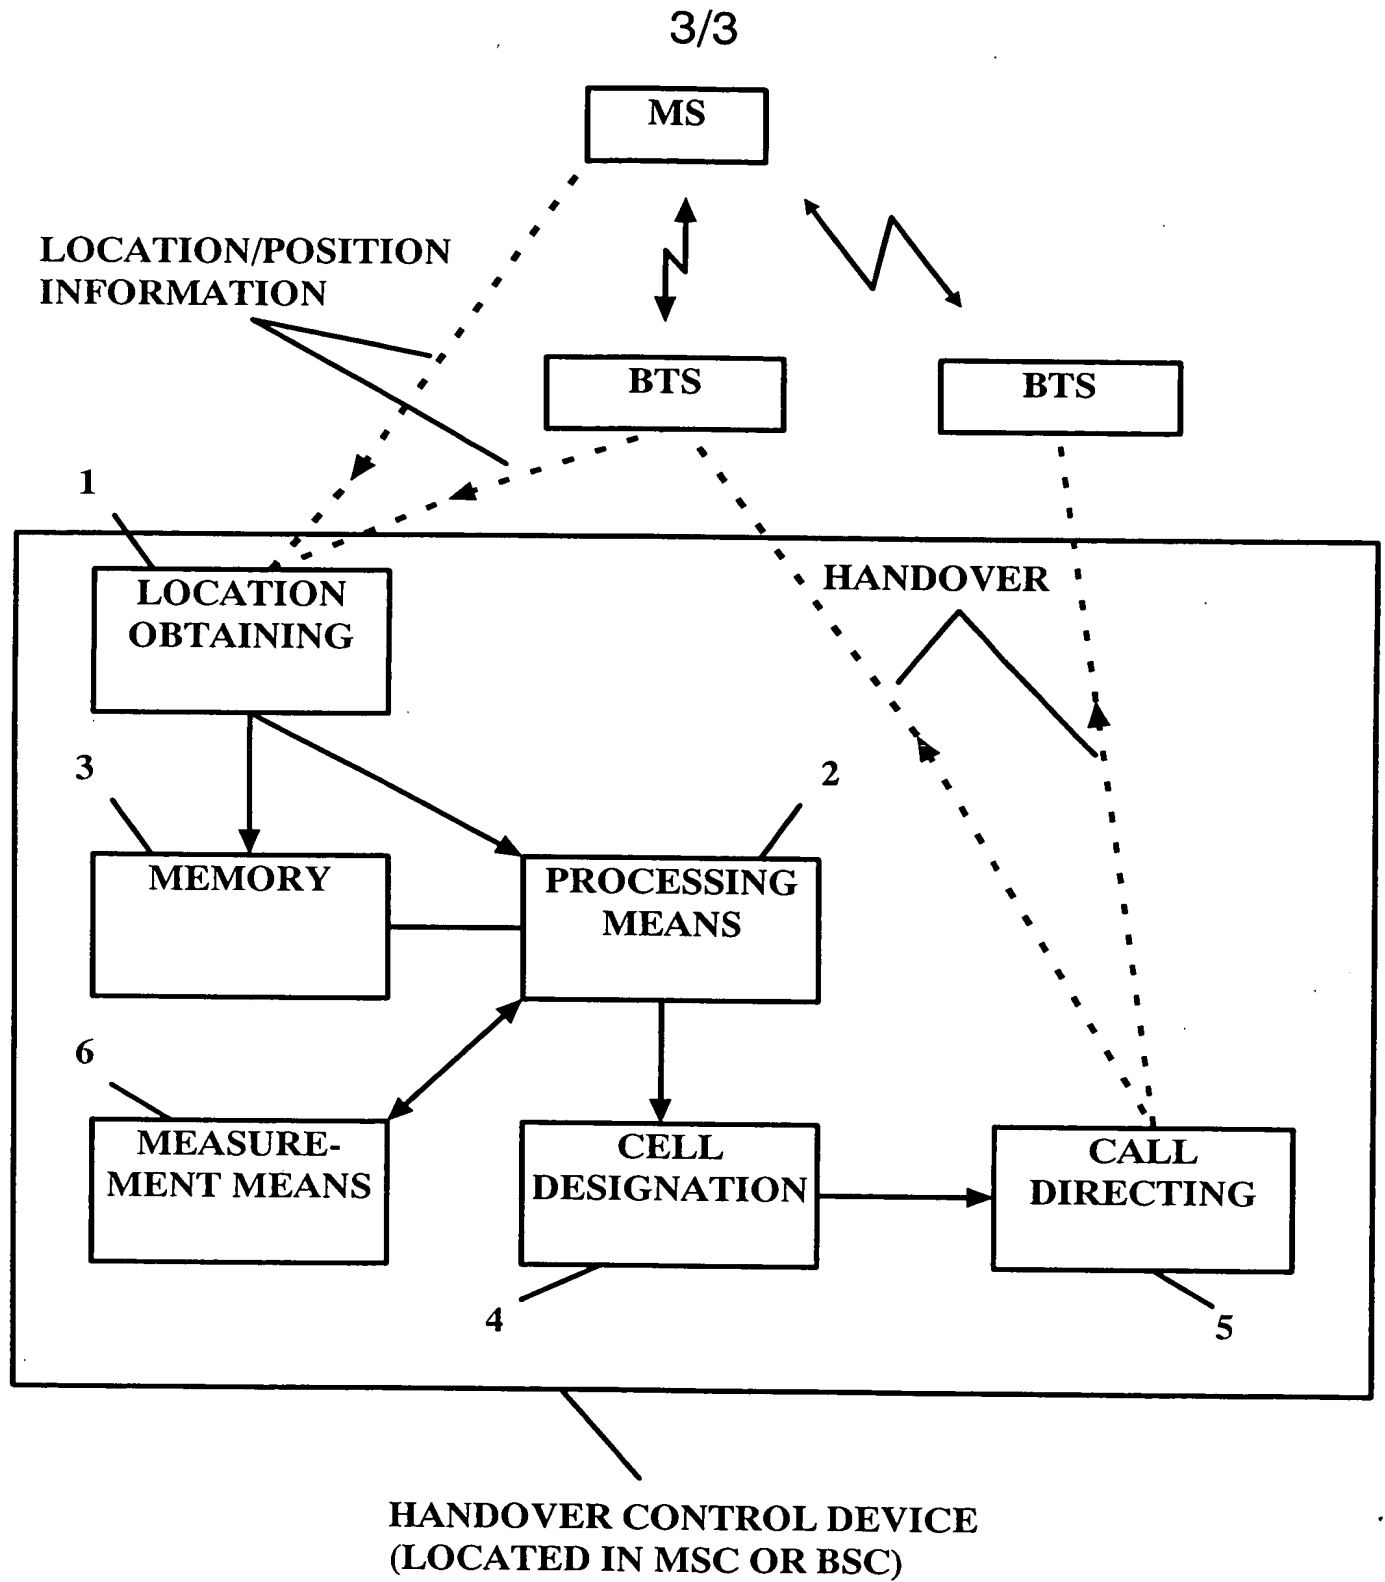


FIG. 3